




GENERAL FEATURES

- Different stroke (measuring) lengths from 300 mm to 2100 mm
- Incremental output
- 0.5 mm or 1 mm Stainless Steel wire
- IP65 protection class
- Compact design
- Easy installation
- 2 m/s maximum speed
- Shock/Vibration resistant
- Aluminum anodized body



AWE 120 wire encoders convert linear motion into incremental digital pulses. Different stroke lengths from 300 mm to 2100 mm are available. Optionally other stroke lengths, resolutions, cable lengths and socket connectors can be requested.

They make measurement by pulling and rewinding stainless steel wire. Usage is practical and usage area is quite wide. By connecting to a counter or position controller, they become a perfect system in high resolutions for position control in wood processing, marble machines, glass processing machines and other machines.


TECHNICAL SPECIFICATIONS




*Stroke (measuring) length	Different measuring lengths from 300 mm to 2100 mm		Maximum Speed	2 m/s
			Required force	2,4N
*Resolution	pulse/mm	mm/edge	Max Output Current	60 mA (per channel)
	10 pulses/mm (standard) 5 pulses/mm	0.025 mm (standard) 0.05 mm	Measuring Type	Optic
*Connection cable	3m (standard), 5m, 10 m		Materials	Housing: Aluminum/steel /ABS plastic
*Supply Voltage	5...30V DC ±20%			Measuring Wire: Stainless steel (0.5 mm or 1 mm)
*Output Signals	A,B,Z (standard) A,B A,/A,B,/B A,/A,B,/B,Z,/Z		IP Protection Class	IP65
			Operating Temperature	-25°C ... +85°C
			Relative Humidity	%95
Accuracy	±0.25% FS		Weight	≈1300 gr

Note: The technical specifications indicated by (*) vary according to the selected model. The detailed code table is shown on page 3.


ELECTRICAL CONNECTION

In the left tablet the cable colors of sensors output signals are given. If the control circuit is suitable in the Line Driver sensors of the not output signals (/A, /B, /Z) have to be added to the system. If it is not suitable /A, /B, /Z signal cables must be fixed as insulated separately. Don't forget that these edges have electricity too.

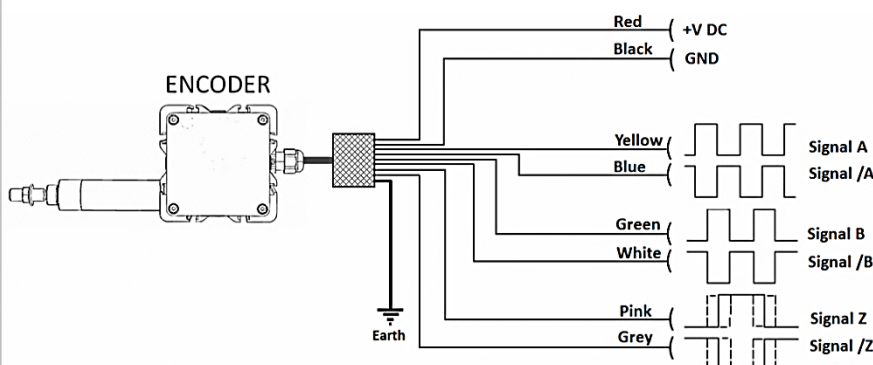


SIGNAL	CABLE COLOR	M12	M16	M23
		SOCKET	SOCKET	SOCKET
				
		PIN NO	PIN NO	PIN NO
A	Yellow	1	1	5
B	Green	2	2	8
+V	Red	3	3	2,12
0V	Black	4	4	10,11
Z	Pink	5	5	3
/A	Blue	6	-	6
/B	White	7	-	1
/Z	Grey	8	-	4
EARTH	Silver	-	-	9

DIMENSIONS

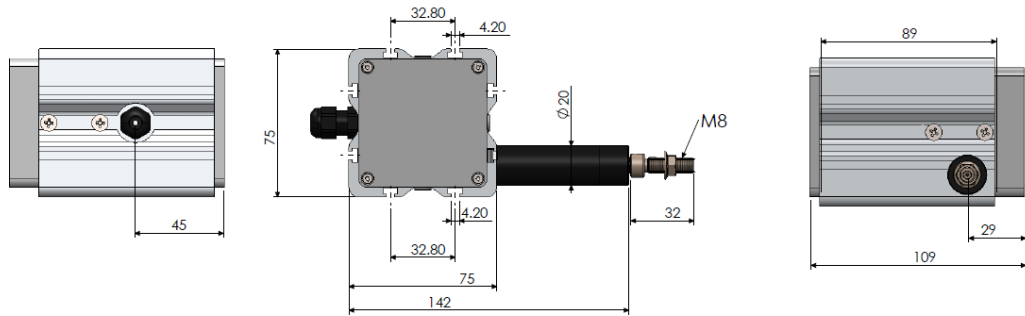


MOUNTING AND WARNINGS


1. Never release the wire after pulling. Otherwise, the coil spring will be damaged.

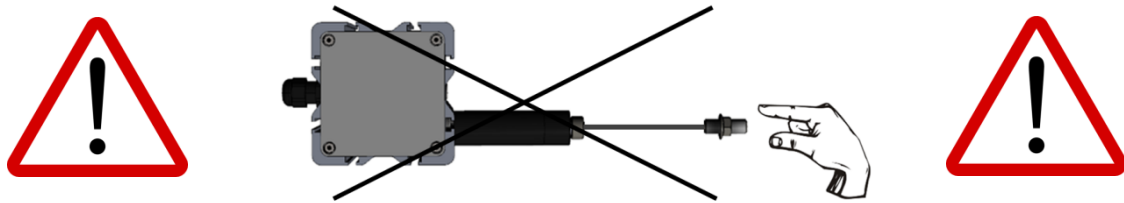


2. Mount the sensor according to the mounting directions shown below.

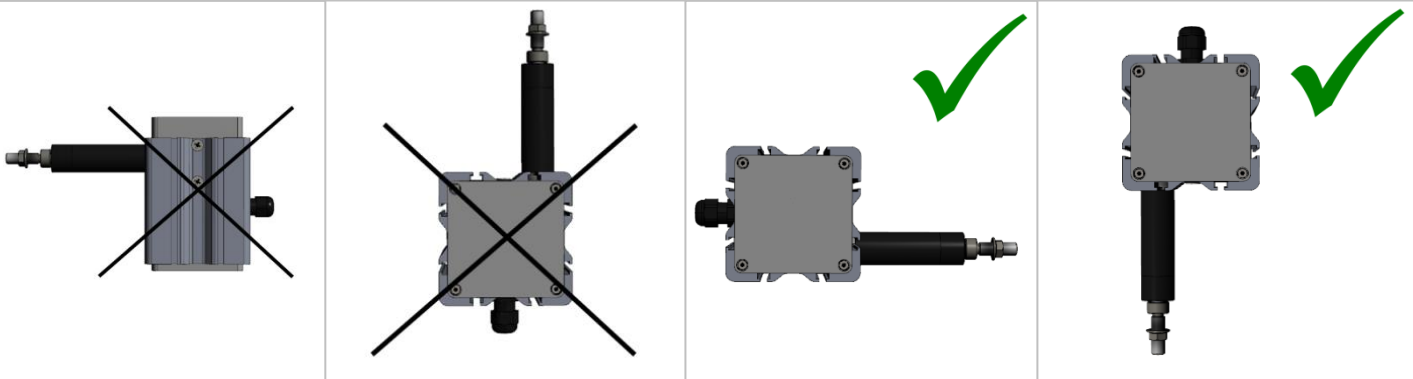

3. If there is a trickle of water (like a rain), the wire outlet must not be a drip of water upstream. If needed please use guide rollers.

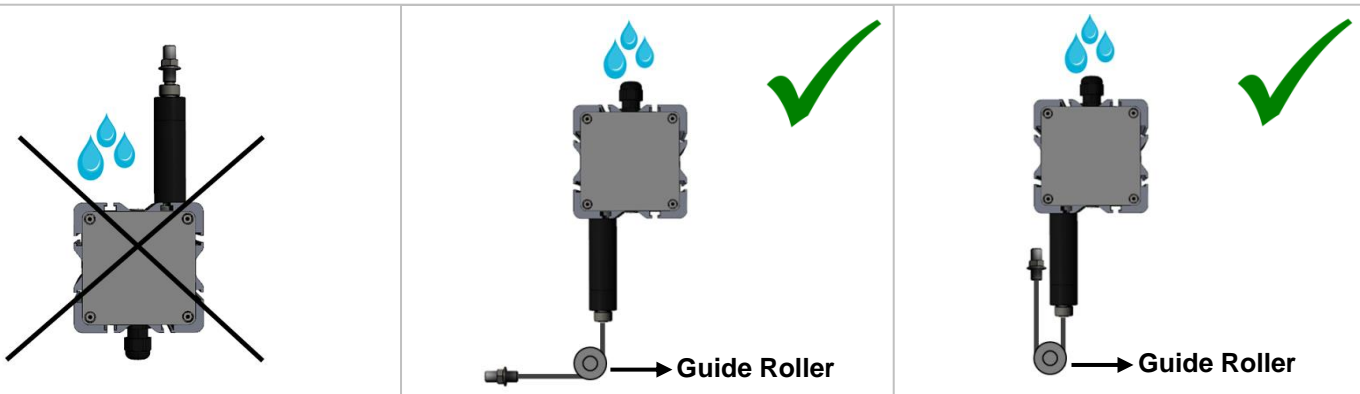


4. The wire should not be pulled in angular. If needed, please use guide rollers.

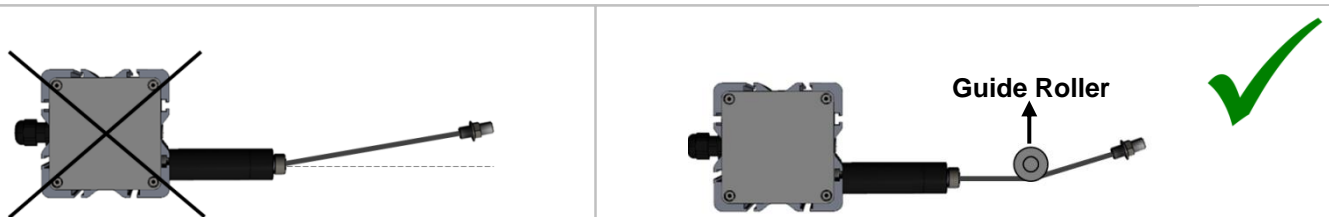

Important Note(!): Failure to comply with these recommendations, the malfunctions that may occur will not be under the warranty.

SOCKET MODELS


M16 8 PIN MALE SOCKET

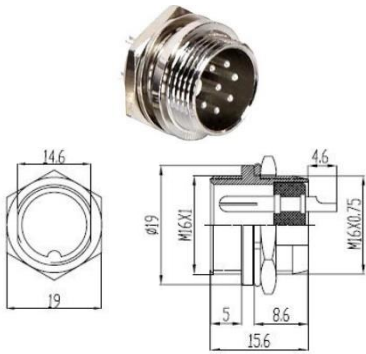

M12 5 PIN MALE SOCKET





M23 12 PIN MALE SOCKET

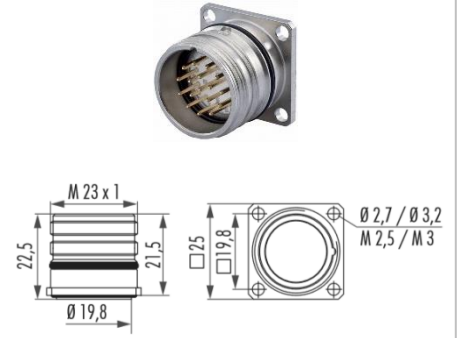

SAMPLE APPLICATION FIELDS

- Elevators
- Press machines
- Crane systems
- Wood processing machines
- Marble processing machines
- Storage positioning
- Dam protections
- Sluice gate control
- Air compressors
- Glass processing machines
- Lifting platforms
- Applications in medical technologies (operating table etc.)
- Forklifts
- Screw machines
- Paper machines
- Sewing machines
- Hydraulic machines
- Sheet metal machines
- Printing machines
- Horizontal control equipments
- Construction machines
- Industrial robots
- Injection machines
- X-Y axis displacement
- Liquid level measurements and position control



ORDER CODE

<p>Model</p> <p>AWE 120</p>	<p>Stroke Length *</p> <p>Different measuring lengths from 300 mm to 2100 mm</p>	<p>Output Signals</p> <p>2 (A,B) 3 (A,B,Z) (standard) 4 (A,/A,B,/B) 6 (A,/A,B,/B,Z,/Z)</p>	
AWE 120	XX	XXX	XXX
	<p>Resolution*</p> <p>01 : 0.1 mm/pulse (standard) 02 : 0.2 mm/pulse</p>	<p>Supply and Output</p> <p>PP : 10...30 VDC Supply : 10...30VDC Output TTL : 5 VDC Supply : 5 VDC TTL RS422 Line Driver Output HTL : 10...30 VDC Supply : 5 VDC TTL RS422 Line Driver Output HPL : 5...30 VDC Supply (standard) : 5...30 VDC Push-Pull</p>	<p>Electrical Connection*</p> <p>3M : 3m (standard) 5M : 5m 10M : 10m S13 : M12 5 Pin Male Socket S16 : M16 8 Pin Male Socket S23 : M23 12 Pin Male Socket</p>

(*) Please contact for other (customized) options.

Atek Sensor Technology A.S.



Tuzla KOSB Organize Sanayi Bolgesi Melek Aras Bulvari, No:67 34956 Tuzla-Istanbul / TURKEY



Tel: +90 216 399 44 04



Fax: +90 216 399 44 02



www.ateksensor.com



info@ateksensor.com